

## THERMAL STRESS ANALYSIS OF INTEGRATED COMBUSTION ENGINE PISTON USING CAE TOOLS

(Aluminum Silicon Alloy, Aluminum Silicon Alloy Steel)

<sup>1</sup>S.SATISH KUMAR, <sup>2</sup>S.SATISH KUMAR, <sup>3</sup>P.YOGESH

<sup>1</sup>Faculty of Mechanical Engineering, <sup>2,3</sup>UG Scholar  
Vel Tech-Avadi, Chennai-600062, Tamil Nadu, India

[kssathishkumar.93@gmail.com](mailto:kssathishkumar.93@gmail.com), [imsathish8897@gmail.com](mailto:imsathish8897@gmail.com), [yogeshparamantham@gmail.com](mailto:yogeshparamantham@gmail.com).

### ABSTRACT

The main intention of this research work is to investigate and analyze the stress distribution of piston at actual engine Condition. In this paper thermal stress analysis is done by two different materials Aluminum Silicon alloy and Aluminum Silicon alloy steel. The parameter used for the analysis is operating temperature and material properties of piston. In I.C(internal combustion) Engine piston is most complex and significant part therefore for smooth running of vehicle piston should be in proper working condition. Piston fails mainly Due to mechanical stresses and thermal stresses. Analysis of piston is done with boundary conditions and uneven temperature distribution from piston head to skirt. The analysis predicts that due to temperature whether the top surface of the piston may be damaged during the operating conditions, because damaged parts are so expensive to replace and generally are not easily available. The CAD model is created Using CATIA V5 R20 software. CAD model is then imported into ANSYS12 software for geometry and meshing purpose. The FEA Performed by also using ANSYS14.


**Keywords:** Aluminum, ic engine Piston, CATIA V5 R20, ANSYS14.

### INTRODUCTION

Computer aided engineering analysis tools offer the tremendous advantage of enabling designers to consider virtually any molding option without incurring the expensive actual manufacturing of the machine parts and machine time associated to make machine component. The ability to try new concepts or idea on the computer gives the option to reduce the problems before beginning production. Additionally, designers can easily and quickly find the sensitivity of specific molding parameters on the quality and production of the final part. The most complex parts can be simulated easily by CAE (computer aided engineering) tool Among engine components exposed to thermal effects, the piston is considered to be one of the most severely stressed, where a large amount of the heat(thermal) transferred to a coolant fluid goes through it, this amount depends on the thermal conductivity of the materials employed, the average speed and the geometry of the piston.

A piston is a component of reciprocating IC-engines. Piston endures the cyclic gas pressure and the inertial forces at work and this working Condition may cause the fatigue (continues loading condition) damage of piston, such as piston side wear, piston head or piston top cracks and so on. So there is a need to optimize the design of piston by considering different parameters in this project the parameters selected are thermal analysis of piston at various temperatures in various stroke. [4] discussed about a disclosure which is made regarding a driving alert system which is designed in the form of a neck cushion which has the capability to sense the posture of the drivers neck position so as to identify whether the driver is alert and if he is dozing of. The system is made intelligent to obtain data from the movement so as to produce triggers to alert the

user and to keep him/her awake to avoid accidents. The system is also linked to a mobile computing device so as to provide a report of the analysis done. The drivers location can also be tracked using the same.

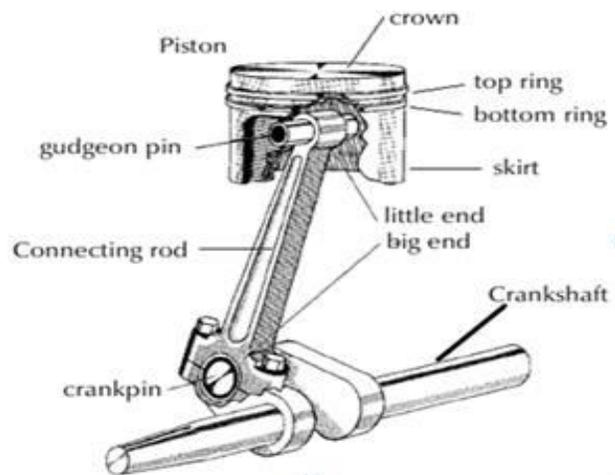

**Fig 1 Piston Assembly**

This analysis could be helpful or useful for design engineer for modification of piston at the time of design. In this project we determine the thermal analysis form that we can find out the various zones or region where chances of damage of piston are possible. From analysis it is very simple to optimize the design of piston. The main requirement of piston design is to measure the prediction of temperature distribution on the surface of piston which enables us to optimize the thermal aspects for design of piston at very low cost. Most of the pistons are made of an aluminum alloy (Al) which has thermal expansion coefficient, 85% higher than the cylinder bore material made of cast iron (CI). This leads to some differences between running and the design clearances. Therefore, analysis of the piston thermal behavior is extremely significantly in designing more efficient compressor. Good sealing of the piston with the cylinder is the basic criteria to design of the piston. Also to improve or develop the mechanical efficiency and reduce the inertia force in high speed machines the weight of the piston also important major role. [6] discussed about a disclosure which is made regarding a gear blocking gear cover for the four wheeler vehicle where the protective cover has been with touch sensors and biometric sensors. Here in case of theft even if the car is started without a key the gear system is locked using biometric locks which can read the palm of the user to unlock the gear system thus protecting the vehicle against any form of theft. This device can be attached to any type of four wheeler vehicle. To allow for thermal expansion, the diameter of the piston must be smaller than that of the cylinder. The need to clearance is calculated by calculating the temperature difference between piston and cylinder and considering the coefficient of thermal expansion of piston.

## II. PISTON MATERIAL'S

### 1-Aluminum Silicon Alloy,

### 2-Aluminum Silicon Alloy Steel

The most commonly used materials for pistons of internal combustion engines are cast iron, aluminum alloy, forged aluminum, cast steel. The cast iron pistons are used for moderately rated engines with piston speeds below 6.9 m / s and aluminum alloy Pistons are used for highly rated engines running at higher piston speeds. It may be noted

- 1) Since the coefficient of thermal expansion for aluminum is about 2.87 times that of cast iron, therefore, a greater clearance must be provided between the piston and the cylinder wall in order to prevent seizing of the piston.
- 2) Since the aluminum alloys used for pistons have high heat conductivity (nearly 4.5 times that of cast iron), therefore, these pistons ensure high rate of heat transfer and thus keeps down the temperature difference between the center and edges of the piston head or piston crown.
- 3) Since the aluminum alloys are about three times lighter than cast iron, therefore, its mechanical strength is high at low temperatures, but they lose their strength (about 60%) at temperatures above 335°C. Sometimes, the pistons of aluminum alloys are coated with aluminum oxide by an electrical method.

S/No	Matrix Material	Reinforcement Material
1	Aluminium	Silicon
2	Aluminium	Silicon (steel 4140)

**Table 1: Materials**

S/No	Material	AlSi Alloy	AlSi (4140 Alloy steel)
1	Young's modulus [GPa]	<b>90</b>	<b>210</b>
2	Poisson's ratio	<b>0.3</b>	<b>0.3</b>
3	Thermal conductivity [W/m °K]	<b>155</b>	<b>42.6</b>
4	Thermal expansion $10^{-6}$ [1/°C]	<b>21</b>	<b>12.3</b>
5	Specific heat [J/kg °C]	<b>960</b>	<b>473</b>
6	Density [kg/m <sup>3</sup> ]	<b>2700</b>	<b>7850</b>

**Table 2: Material Property's****III. DESIGN CONSIDERATIONS OF A PISTON**

In designing a piston for I.C. engine, the following points should be taken into consideration

1. It should have enormous strength to withstand the high gas pressure and inertia forces.
2. It should have minimum mass to minimize the inertia forces.
3. It should form an effective gas and oil sealing of the cylinder.
4. It should provide sufficient bearing area to prevent undue wear.

**Piston Function Design Requirement**

1. Easily move to the reciprocating motion inside of cylinder.
2. Reducing friction between the connecting rod and piston pin.
3. There is no strain occurring the wrist pin.
4. Piston move even at minimum (low) pressure.

**Piston Structural Design Requirement**


1. Piston designed in cylindrical shape because easily Move to the up & down direction.
2. Piston should be a compact size.
3. Piston head geometry (curve, flat) should be in correct shape so that in gives maximum efficiency.

**IV.DIMENSIONS OF PISTON**

S/NO	PARAMETERS	DIMENSION(mm)
1	Piston Diameter	80
2	Piston Height	92
3	Skirt Height	63
4	Piston Inner Diameter	58.9
5	Radial Thickness	3.9


**Table 3: Piston Dimensions****IV .THE BOUNDARY CONDITIONS**

- 1) Temperature Level of piston head =573K (273+300)
- 2) Temperature Level of piston ring =493K (273+220)
- 3) Temperature Level of piston skirt=463K (190+273)
- 4) Temperature Level of piston bottom portion =243K (273+70)

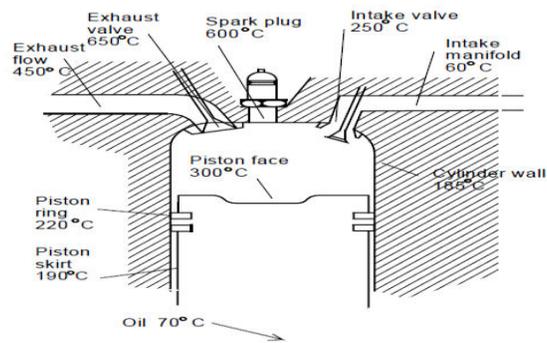


**Fig 2 boundary conditions**

### V FINITE ELEMENT MODEL

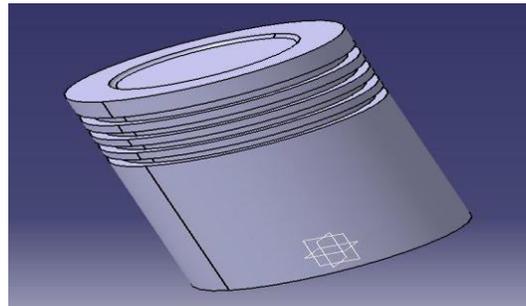

**Fig 3 CATIA V5R20 Model**

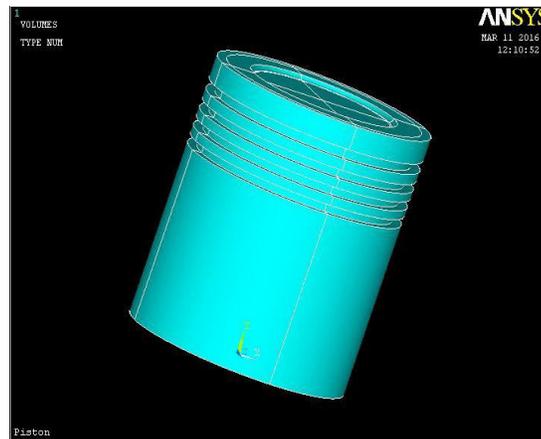


**Fig 4 Imported ANSYS Model**

### VI RESULT AND DISCUSSION


The piston is divided four equal parts because the full piston analysis takes long time so .the symmetric condition is to be applied

1 ) Aluminum alloy


i) Nodel Temperture

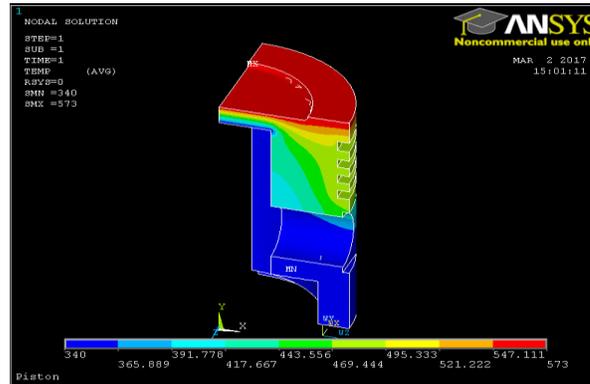


ii) Thermal Gradient (Ydirection)

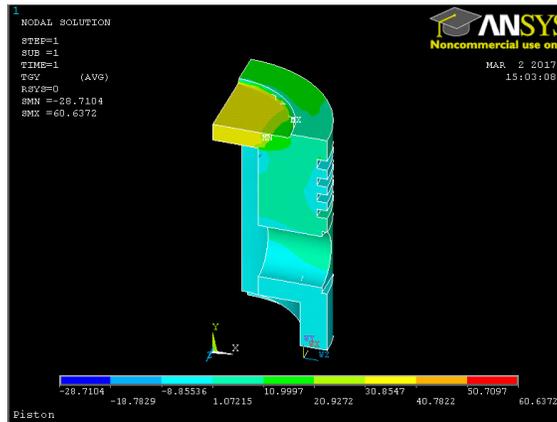


Thermal Gradient Vector Sum

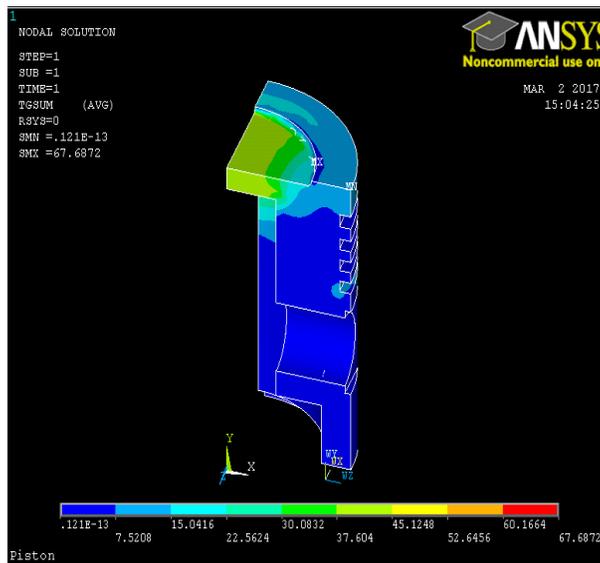


v) Thermal Flux

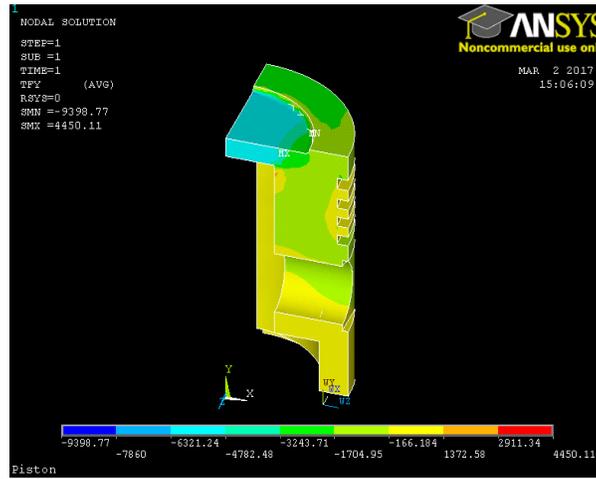


2) Aluminum Alloy Steel

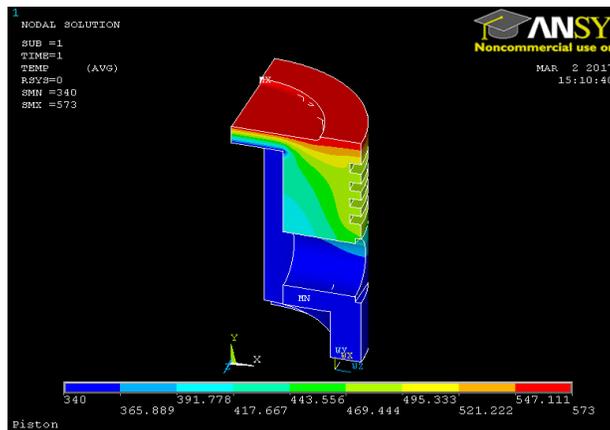


i) Nodal Temperature

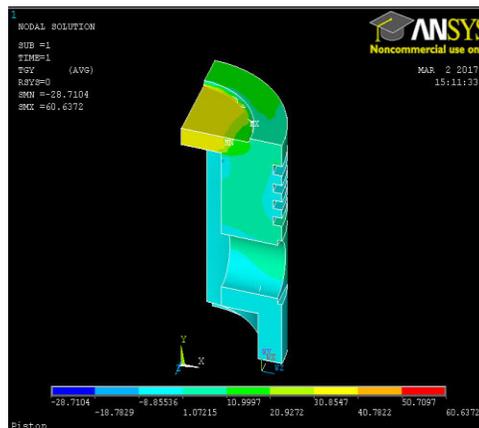

**ii) Thermal gradient(Y direction)**

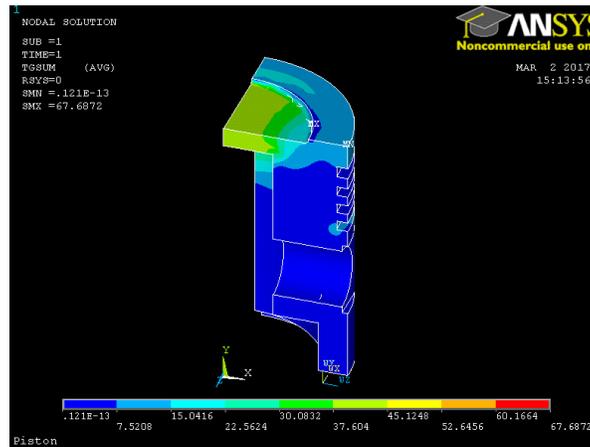

**iii) Thermal gradient vector sum**

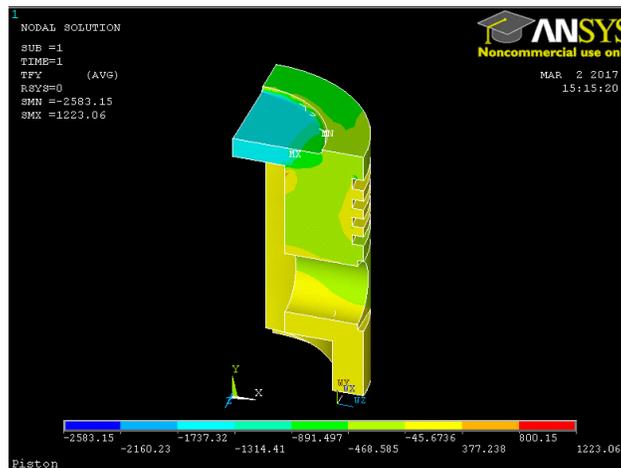

**iv) Heat flux**

**VII .CONCLUSION**

1. Aluminum silicon alloy should be used as a piston Material as it has minimum thermal stress and mechanical distortion in same working condition as that of cast iron and structural steel as piston material.
2. Aluminum silicon alloys are lighter in weight thus Conceded good mechanical strength at low Temperatures.
3. Aluminum silicon alloy shave high heat (thermal) conductivity thus high rate of heat transfer is possible between the centre and edge of the piston head.
4. Use of CAE software eliminates the human effort in determination of stress, distortion values and so are referred as good tool for piston mechanical as well as thermal analysis.
5. compare thermal flux on aluminium silicon alloy and aluminium silicon alloy steel .the aluminium silicon alloy is withstand the high thermal load it shown in above results so aluminium silicon alloy is suitable material for piston

### VIII . REFERENCES

- [1] A.Atish Gawale, A. Shaikh “Nonlinear Static Finite Element Analysis and Optimization of connecting rod WorldJournal of Science and Technology, Vol. 2(4), pp .01-04, 2012.
- [2] R. Bhagat, Y. M. Jibhakate, Thermal Analysis and Optimization of I.C. Engine Piston Using Finite Element Method, International Journal of Modern EngineeringResearch (IJMER), Vol.2, Issue.4, pp.2919-2921, 2012.
- [3] Kamo R., Assanis D.N., Bryzik W.: Thin thermal barrier coatings for engines. SAE Transactions 1989, No 980143.
- [4] Christo Ananth,Dr. S. Selvakani,Dr. R. Latha,Dr. S. Pushpa, Dr. R. Kesavan, "Neck Cushion Based Alert System", Application number: 320692-001, Cbr number: 15490, Journal No.: 40/2019 , Journal Date: 04/10/2019, Indian Patents, Design & Trademark Office, 4th October 2019.
- [5] P. Carvalheira1, and P. Gonçalves, FEA of Two Engine Pistons Made of Aluminium Cast Alloy A390 and Ductile Iron 65-45-12 Under Service Conditions, 5<sup>th</sup> International Conference on Mechanics and Materials in Design Porto-Portugal, 24-26, pp .1-21, 2006.
- [6] Christo Ananth,Dr. J. Mahil,Dr. A. Anto Spiritus Kingsly,Stalin Jacob,Jenifer Darling Rosita,Niha K, "Touch Based Gear Locking", Application number: 320649-001, Cbr number: 15401, Journal No.: 41/2019 , Journal Date: 11/10/2019, Indian Patents, Design & Trademark Office, 11th October 2019.
- [7] Properties And Selection: Irons, steels and high performance alloy, ASM Handbook, vol. 1, ASM International, 1990.
- [8] A.C. Alkidas, Performance and emissions achievements with an uncooled heavy duty, single cylinder diesel engine, SAE, vol. 890141, 1989.
- [9] A.C. Alkidas, Experiments with an uncooled single cylinder open chamber diesel, SAE Paper, vol. 870020, 1987.
- [10]S.Sathishkumar,Dr. M. Kannan “Topology Optimization Of Integrated Combustion Engine Piston Using FEA Method (CAE Tools) Acta Mechanica Malaysia (AMM) ISSN: 2616-4302